

Keep upright at all times. Shake/stir well before and during application.

- Barrettime Decking Oil has been specially formulated to offer Oil, Protection and Staining all in one application.
- It resists flaking and peeling and being water repellent helps prevent timber splitting and cracking.
- It can also be used on other wooden garden structures and is harmless to plants and pets when dry.
- Shake/stir well before and during application.
- Product gives a transparent / translucent finish colour effect to wood, the grain texture is still visible.

WHERE TO USE

For use on all pre-treated, pressure treated and preservative impregnated timber, offers superb protection to Decking Boards, Deck Tiles and Balastrading. Also as a superior finish to sheds, Huts and Fencing.

Note: Cannot be used over timber that has been previously painted with conventional paints, varnishes, lacquers etc without first removing such barrier coatings.

COVERAGE

One coat - up to 8 sq metres per litre on smooth timber or up to 6 sp meters per litre on rough sawn timber.

PREPARATION

Decking has usually been pre-treated with a preservative. If using new, unpreserved timber treat with Barrettime Universal Preservative (ideally two coats). Leave to dry for 24 - 48 hours prior to using Decking Oil. Ensure all surfaces are clean, dry and free from dust, dirt and algae. Treat with Barrettime Knockout® Mould & Mildew Cleaner if necessary. New wood should be first wiped down with White Spirit to remove surface resins etc. Highly resinous timbers and some hardwoods may effect performance and final results. Test in an inconspicuous area before use.

APPLICATION - SHAKE WELL

Decant into paint kettle and apply an even coat to all surfaces to ensure optimum performance. For best results, apply to all sides of decking before construction, brushing in the direction of wood grain. Normally one coat applied liberally with a wide bristle brush is sufficient, however should you require a deeper colour a second coat may be applied after 12-24 hours. Product gives a transparent / translucent finish colour effect to wood, the grain texture is still visible, especially on light colours leaving a matt or sheen finish depending upon number of coats.

Barrettime Products

St. Ivel Way, Warmley, Bristol. BS30 8TY. UK
T: +44 (0) 117 9600060 E: sales@barrettime.co.uk
www.barrettimePro.co.uk

If desired Barrettime Decking Oil may be applied by synthetic roller or sprayer. However always back brush to ensure even coverage.

Leave for 24 - 48 hours or until dry before subjecting to heavy foot traffic. Recoat as and when desired. Do not apply if the ambient temperature is below 5 Celsius, in damp conditions or rain is likely within 24 hours of application.

CLEANING

Remove as much of the product from brushes etc before cleaning with Barrettime White Spirit. Clean any spills before it is allowed to dry.


Note: Immediately after use saturate all soiled cloths with water and dispose of safely outside the home.

HEALTH, SAFETY & ENVIRONMENTAL INFORMATION

Contains: Hydrocarbons, C9-C11, n-alkanes, isoalkanes, cyclics, < 2% aromatics; Naphtha (petroleum), hydrotreated heavy.

Flammable liquid and vapour. May be fatal if swallowed and enters airways. May cause drowsiness or dizziness. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Avoid breathing fume, mist, vapours, spray. Use only outdoors or in a well-ventilated area. Wear protective gloves, protective clothing, eye protection, face protection, - IF SWALLOWED: Immediately call a POISON CENTER, a doctor. Do NOT induce vomiting. Store locked up. Dispose of contents, container to hazardous or special waste collection point, in accordance with local, regional, national and/or international regulation. Contains 1-Acetyl-4-(3-dodecyl-2,5-dioxo-1-pyrrolidinyl)-(2,2,6,6-tetramethylpiperidine)(106917-31-1), cobalt bis(2-ethylhexanoate)(136-52-7). May produce an allergic reaction. Repeated exposure may cause skin dryness or cracking.

UN N° 1268

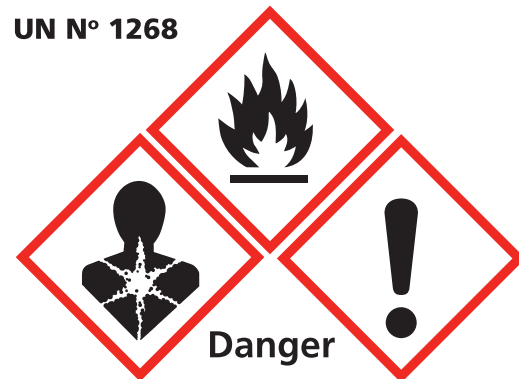

VERY HIGH: VOC content more than 50% VOC's (Volatile Organic Compounds) contribute to atmospheric pollution. EU limit value for this product (cat/A/f): 700 g/l (2007) 700 g/l (2010). This product contains max 568 g/l VOC

Barrettime (Europe) Ltd

Unit 3D North Point House, North Point Business Park,
New Mallow Road, Cork. T23 AT2P. Ireland
T: +44 (0) 117 9600060


Barrettime
TRUSTED BY THE PROFESSIONALS

PREMIER

DECKING
ALL IN ONE
DECKING TREATMENT **OIL**



Regular treatment gives
Superb water repellency

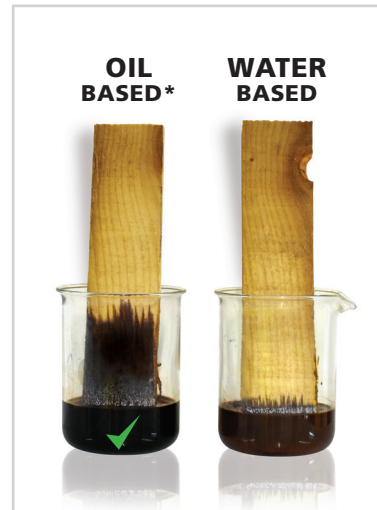

- ✓ OIL/SPIRIT BASED
- ✓ DEEPER PENETRATION
- ✓ GREATER PROTECTION

UFI: 3G20-JOP5-G00X-KKM1

SHAKE WELL
BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)

5 Litre e

Barrettime
TRUSTED BY THE PROFESSIONALS


PREMIER



DECKING
ALL IN ONE
DECKING TREATMENT **OIL**

✓ Oils ✓ Protects ✓ Stains

Contains Added **UV Stabilisers**

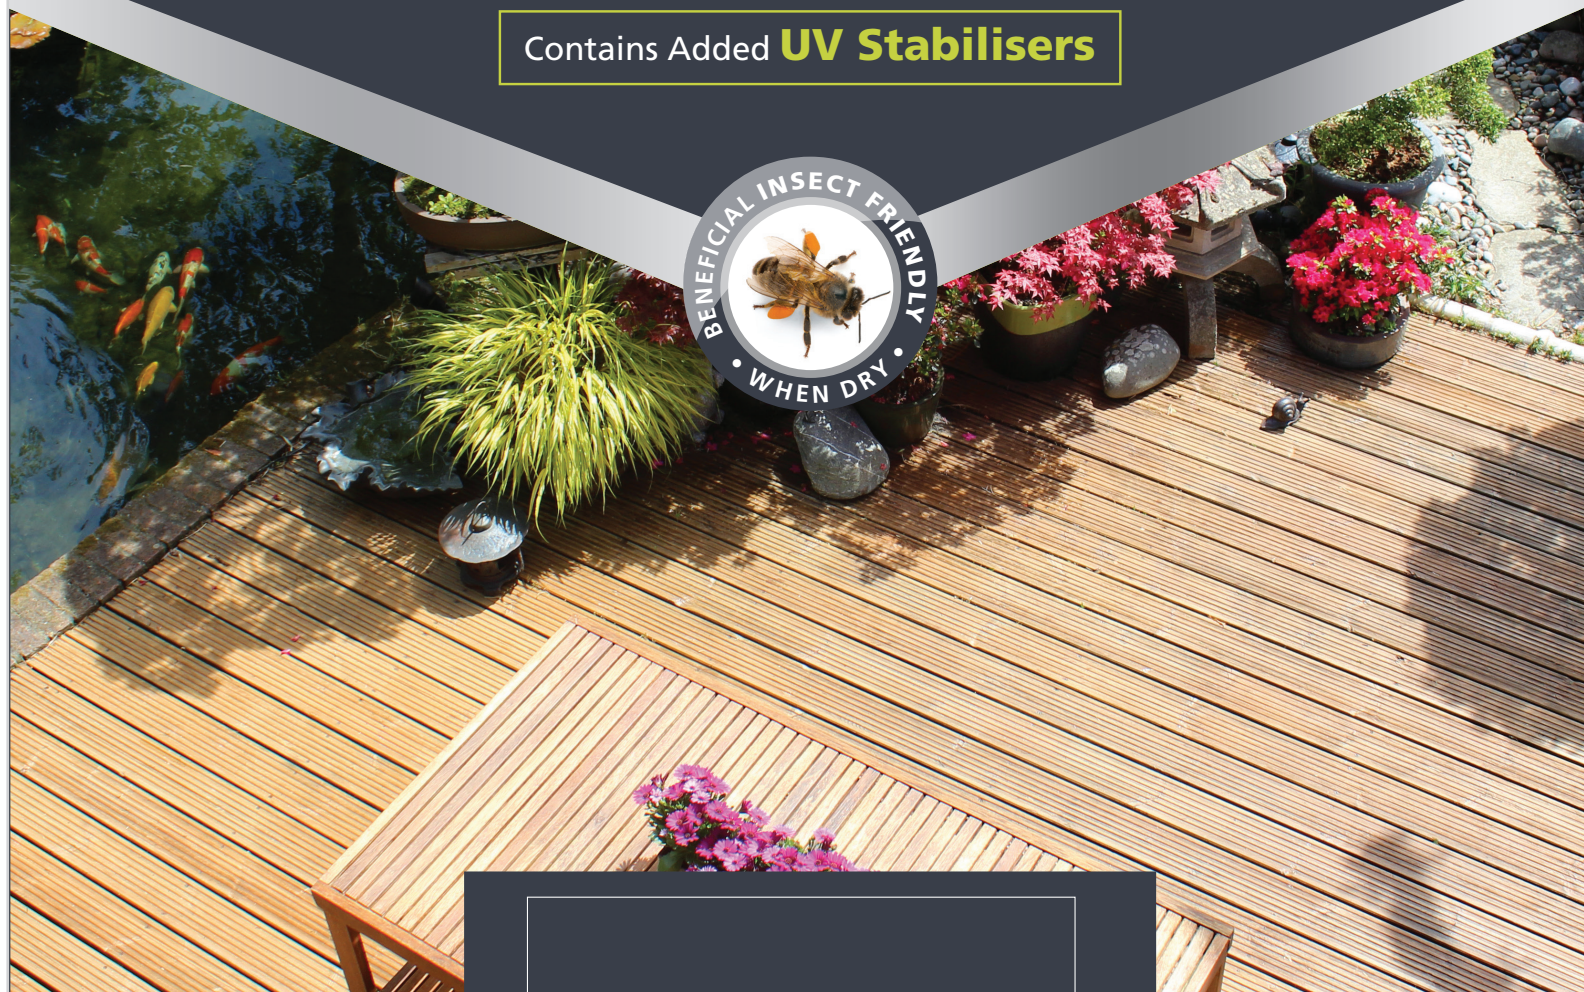


PROVIDES A TRANSPARENT /
TRANSLUCENT FINISH COLOUR
EFFECT TO WOOD.

5L e

RELEASE
POURING SPOUT
TO POUR PRODUCT.

For full instructions,

SCAN ME



The following colours are also available
in our Decking Oil Range.

Natural Oak

Amber Light Oak

Dark Oak

Cedar Red

Rosewood

Clear

The colour swatches are an indication only
and representative of the product applied
to clean new/pale timber. The final colour
finish can vary considerably due to the
age, type & condition of the timber being
treated. We always recommend carrying
out a test area first in an inconspicuous
area to make sure you are happy with the
final dried colour/finish.

SHAKE WELL
BEFORE & DURING USE
(FOR AT LEAST ONE MINUTE)

5 Litre e